




ProCair Plus  
and Optional CBC Control Unit  
Non-Powered, Convertible Alternating Pressure Therapy System

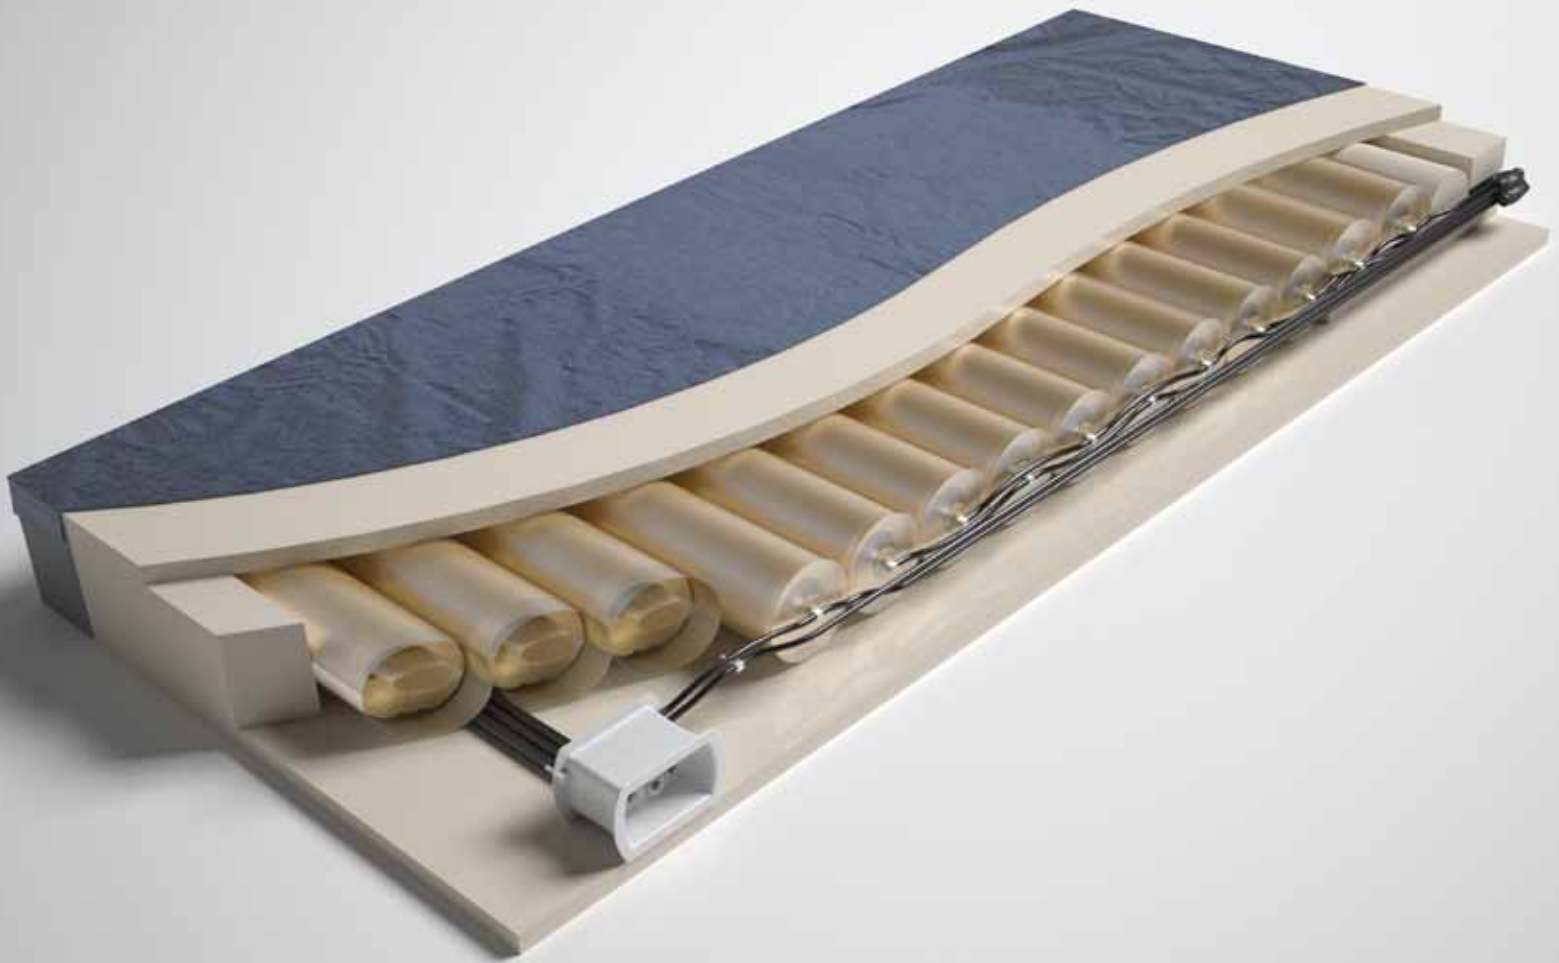

transforming wound management

# ProCair Plus and Optional CBC Control Unit

## Non-Powered, Convertible Alternating Pressure Therapy System



### Features and Benefits

#### Mattress Therapy Features

- Three-zoned system (shoulder, torso and foot) inner air core automatically adjusts to each patient's body profile and weight
- P.R.O. Technology valve maintains optimal air pressures in each therapy zone for superior pressure redistribution regardless of patient weight and profile
- One-inch viscoelastic topper enhances pressure redistribution and patient comfort
- Fifteen cells with 14 providing alternating pressure therapy with optional control unit
- Surrounding firm perimeter provides stability during patient care and contributes to patient safety by eliminating gaps between frames and siderails
- Therapy pad with these unique qualities:
  - Fluid proof and stain resistant
  - Low friction and low shear surface
  - Zippered construction
- Available in multiple widths and lengths
- Meets flammability standards TB 117, TB 129, 16 CFR 1633 and BFD IX-11

#### Optional CBC Control Unit

- Convert your ProCair Plus to alternating pressure therapy to enhance patient comfort and wound healing
- Three alternating pressure zones, including the delicate heel section for optimal pressure redistribution
- Two modes of operation – *Alternate and Powered (static)*
  - Preset *Alternate* cycle time of 10 minutes
  - *Powered* control settings for 10 levels to maximize patient compliance and promote healing
- Closed loop control system eliminates concerns of changes in mattress interface pressure due to patient repositioning and ambient temperature changes

### Clinical Indications

**Pressure Relief:** Stage I – II Pressure Ulcers<sup>1</sup>; Rehabilitation; Burns; Neurology; Dermatology; Amputations

**Pain Management:** AIDS; Arthritis; Oncology

<sup>1</sup>Stage II in non-powered mode and up to uncomplicated Stage III or IV using alternating pressure mode with optional control unit based on individual patient assessment.

### Technical Specifications

**Maximum Weight Capacity\*:** 500 lbs.

#### Control Unit

Weight: 4 lbs.

Dimensions: 11"(W) x 5.5"(H) x 3.5"(D)

#### Mattress Dimensions:

36"(W) x 80"(L) x 7"(D)

36"(W) x 84"(L) x 7"(D)

42"(W) x 80"(L) x 7"(D)

#### Agency Approvals (CBC Control Unit)

UL Classified: UL 60601-1 CAN/CSA C22.2 No. 601.1-M90

#### Electrical Specifications (CBC Control Unit)

120V AC, 60 Hz, 1A

#### Environmental Conditions

Operating Conditions

Ambient Temperature: +10°C to +40°C

Relative Humidity: 30% to 75% Non-Condensing

Storage and Shipping Conditions

Ambient Temperature: -10°C to +40°C

Relative Humidity: 10% to 100%

\*Mattress weight capacity only; total weight must not exceed bed frame manufacturer's specified load capacity.

Joerns reserves the right to change specifications without notice.



www.joerns.com • email: info@joerns.com

#### Post Acute, Acute, HomeCare

2430 Whitehall Park Drive  
Charlotte, NC 28273  
(P) 800.826.0270  
(F) 800.457.8827

#### VA/Government

19748 Dearborn Street  
Chatsworth, CA 91311  
(P) 800.966.6662  
(F) 800.232.9796

#### Canadian Office

1000 Clarke Road, Suite 6  
London, ON Canada N5V 3A9  
(P) 866.546.1151  
(F) 519.451.8662

© 2012 Joerns Healthcare • 6220177 RevG • 12-0061